

This data sheet details Thrislington Gulf material specification, options and dimensions.

80mm specification falls into two sections:

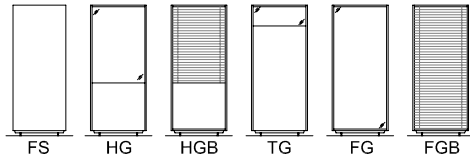
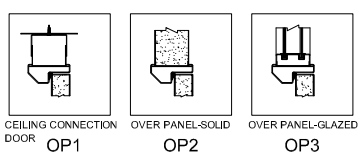
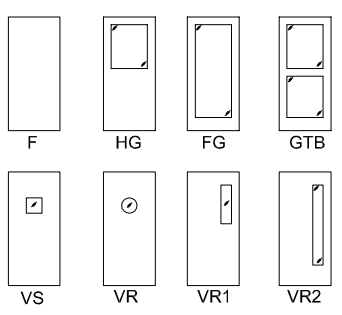
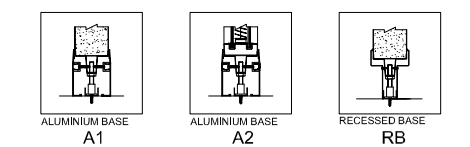
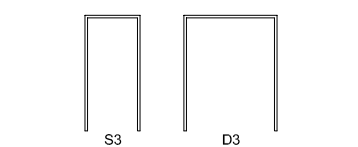


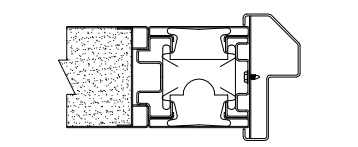
Section One: Deals with the formalities of tendering, preliminaries, contractual, statutory and product performance considerations.

Section Two: Deals with the physical properties and performance fields of the product.

Standard Options

Composite Panel Code	Solid	Glaze	Base	Panel connection	Corner connection	Door	Door overpanel	RAL colour	Hardware	Complete from following Codes

Solid panel	Code <input type="text"/> : (see below)	
	Modular twin tray construction with welded assembly.	
Panel skin	1mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent	
Panel thickness	80mm.	
Panel core	Non Combustible mineral fibre infill or Honeycomb core.	
Glaze panel	Code <input type="text"/> : Full glaze	Code <input type="text"/> : Full glaze with blinds
	Code <input type="text"/> : Half glaze	Code <input type="text"/> : Half glaze with blinds Code <input type="text"/> : Top glaze
Panel bases	Code <input type="text"/> : Aluminium	Code <input type="text"/> : Recessed
Panel connection	Code <input type="text"/> : M/F	Code <input type="text"/> : Pilaster
Corner connection	Code <input type="text"/> : Corner cover	Code <input type="text"/> : 90° corner panel
Door overpanel	Code <input type="text"/> : Solid	Code <input type="text"/> : Glaze
Solid Panel finish	Code <input type="text"/> PR : Polyester powder coating RAL	
Glaze Panel finish	Code <input type="text"/> PR : Polyester powder coating RAL	
Door Leaf	Code <input type="text"/> (see below)	
	Modular twin tray construction with lock formed / seam welded assembly. double door with or without astragal.	
Door Skin	1mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent	
Door Leaf Thickness	44mm.	
Door Core	Non Combustible mineral fibre infill or Honeycomb core.	
Frame	Code <input type="text"/> (see below)	
Door frame	1.5mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent.	
Frame assembly	Welded.	
Door frame and door finish	Code <input type="text"/> PR : Polyester powder coating RAL	
Vision panel options	Code <input type="text"/> : (see below)	Size <input type="text"/> : (see below)
Hardware options	Code <input type="text"/> : (see below)	

Panel configuration	Door overpanel detail	Door leaf configurations																																				
 <p>Blinds optional at extra over costs</p>																																						
Panel bases	Frame configurations																																					
																																						
Panel connections	Corner connections	Standard Frame connection																																				
																																						
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="4">Dimensional Range(all dimensions are in mm)</th> </tr> <tr> <th>Door panel Configurations</th> <th>Sizes</th> <th>Vision panel Configurations</th> <th>Sizes</th> </tr> <tr> <td>S3</td> <td>1010x2080</td> <td>HG</td> <td>630x600</td> </tr> <tr> <td>D3</td> <td>2010x2080</td> <td>FG</td> <td>630x1750</td> </tr> <tr> <td colspan="2">Hardware options</td> <td>GTB</td> <td>630x790x2</td> </tr> <tr> <td>A</td> <td>Personal entrance</td> <td>VS</td> <td>300x300</td> </tr> <tr> <td>B</td> <td>Store or service</td> <td>VR</td> <td>300 dia</td> </tr> <tr> <td>C</td> <td>Passage corridor</td> <td>VR1</td> <td>200x600</td> </tr> <tr> <td></td> <td></td> <td>VR2</td> <td>200x1740</td> </tr> </table> <p>Various finishes are available at extra over costs</p>	Dimensional Range(all dimensions are in mm)				Door panel Configurations	Sizes	Vision panel Configurations	Sizes	S3	1010x2080	HG	630x600	D3	2010x2080	FG	630x1750	Hardware options		GTB	630x790x2	A	Personal entrance	VS	300x300	B	Store or service	VR	300 dia	C	Passage corridor	VR1	200x600			VR2	200x1740
Dimensional Range(all dimensions are in mm)																																						
Door panel Configurations	Sizes	Vision panel Configurations	Sizes																																			
S3	1010x2080	HG	630x600																																			
D3	2010x2080	FG	630x1750																																			
Hardware options		GTB	630x790x2																																			
A	Personal entrance	VS	300x300																																			
B	Store or service	VR	300 dia																																			
C	Passage corridor	VR1	200x600																																			
		VR2	200x1740																																			